



Philips Signage Solutions
C-Line Display

65"

Powered by Android
350 cd/m²

SignageSolutions



65BDL6051C

Interactive meeting display

high-end capacitive multi-touch technology

Maximise engagement and inspire collaboration with an interactive Philips C-Line display. These Android-powered displays are made to withstand heavy daily usage and feature up to 10 touchpoints, edge-to-edge glass and a flush design.

Interactive and collaborative

- Wireless screen sharing and advanced collaboration
- HID Capacitive Touch with USB Plug and Play
- Operate, monitor and maintain with CMND and Control

Smart and powerful

- Anti-glare toughened glass
- Install and use your preferred apps and features
- Whiteboard mode built in
- Fast and easy video conferencing
- Crestron Connected certified
- OPS slot allows for PC embedding without cabling
- Android SoC processor. Native and web apps

PHILIPS

Highlights

Wireless screen sharing

Display four feeds on the one screen. Wireless screen sharing allows you to connect multiple devices at the same time for quick content switching when you need it. Use your existing Wi-Fi network to instantly and securely connect devices or use our optional HDMI interact dongles to cast directly to the screen without needing to connect to your secured/protected network.

HID Capacitive Touch

Capacitive Touch gives you the cutting edge appearance of edge to edge glass with a bezel width of just 1.5 mm! Create a memorable interactive experience with up to 10 touchpoints at the same time. Perfect for collaborative and competitive applications, this display connects your audience with any content — making it ideal for education, public venues, corporate, hospitality and retail settings.

CMND and Control



Run your display network over a local (LAN) connection. CMND and Control allows you to

perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

Whiteboard mode built in

Inspire agile collaboration with whiteboard mode. Simply activate this feature to turn your display into a blank canvas that can be drawn on by multiple users by hand or with dedicated display markers. Everything on the screen can then be captured for easy printing or file sharing.


Fast and easy video conference

Ready to use video conferencing software makes one-to-one or group video calls easier than ever. Simply use your own camera or add the optional Logitech Meetup bundle for an all-in-one ConferenceCam solution.

Crestron Connected certified

Integrate this Philips Professional Display to your Crestron network for full remote control via your laptop, desktop or mobile device. Switch the display on and off, schedule content, manage settings and easily connect external devices. Crestron Connected[®] provides a fast, reliable and secure enterprise level solution for system control.

OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

Powered by Android

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimised for native Android apps and you can install web apps directly to the display too. A new Android OS ensures the software is kept secure and stays up to date with the latest specification for longer.

Specifications

Picture/Display

- Diagonal screen size: 64.5 inch / 163.83 cm
- Panel resolution: 3840 x 2160
- Optimum resolution: 3840 x 2160 @ 60 Hz
- Brightness: 350 cd/m²
- Contrast ratio (typical): 1300:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 9 ms
- Pixel pitch: 0.372 (H) x 0.372 (V) mm
- Display colours: 1.07 billion
- Viewing Angle (H / V): 178 / 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, Motion compens. deinterlacing, 3D MA deinterlacing, Dynamic contrast enhancement, Progressive scan
- Operating system: Android 9

Connectivity

- Video input: HDMI 2.0 (x 4), Display Port 1.2 (x 1), DVI-I (x 1), USB 2.0 (x 2), USB 3.0 (x 2), USB-C
- Video output: DisplayPort 1.2 (x 1), DVI - D (x 1), HDMI 2.0 (x 1)
- Audio input: 3.5 mm jack
- Audio output: 3.5 mm Jack (x 2)
- Other connections: OPS, micro SD
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack

Supported Display Resolution

• Computer formats

Resolution	Refresh rate
1024 x 768	60, 70 Hz
1152 x 864	60, 70, 75 Hz
1152 x 900	66 Hz
1280 x 720	60, 70 Hz
1280 x 768	60 Hz, 75 Hz
1280 x 800	60, 75 Hz
1280 x 960	60 Hz
1280 x 1024	60, 67, 75 Hz
1360 x 768	60 Hz
1366 x 768	60 Hz
1400 x 1050	60, 75 Hz
1440 x 1050	60 Hz
1440 x 900	60, 75 Hz
1600 x 1200	60 Hz
1600 x 900	60 Hz
1680 x 1050	60 Hz
1920 x 1080	60 Hz

1920 x 1200	60 Hz
640 x 350	70 Hz
640 x 480	60, 67, 72, 75 Hz
720 x 400	70 Hz
800 x 600	56, 60, 72, 75 Hz
832 x 624	75 Hz
848 x 480	60 Hz
960 x 720	75 Hz
• UHD Formats: 3840 x 2160, 24, 25, 30, 60 Hz, 3840 x 2160, 50 Hz	
• Video formats	
Resolution	Refresh rate
1080i	50, 60 Hz
1080p	50, 60 Hz
480p	60 Hz
4K x 2K	50, 60 Hz
576p	50 Hz
720p	50, 60 Hz

Dimensions

- Set dimensions (W x H x D): 1485.1 x 860.10 x 86.2 mm (D@wall mount)/ 97.4 mm (D@speaker Cover) mm
- Set dimensions in inch (W x H x D): 58.47 x 33.86 x 3.39 (D@wall mount)/ 3.83 (D@speaker Cover) inch
- Bezel width: 1.50 mm (even)
- Product weight (lb): 100.97 lb
- Product weight: 45.8 kg
- VESA Mount: 400 (H) x 400 (V) mm, M8
- Smart Insert mount: 6*M4*L6, 100 mm pitch, Max. Size 150 mm x 300 mm

Convenience

- Placement: Landscape
- Keyboard control: Hidden, Lockable
- Signal loop through: RS232, IR Loop through, DisplayPort
- Network controllable: RJ45, RS232
- Energy-saving functions: Smart Power
- Screen-saving functions: Pixel Shift, Low Bright
- Ease of installation: Smart Insert
- DPMS power saving system

Power

- Standby power consumption: <0.5 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 190 W
- Consumption (Max): 320 W

Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20~80% (operating), 5~95% (storage) %
- Altitude: 0 ~ 3000 m
- MTBF: 30,000 hour(s)

Sound

- Built-in speakers: 2 x 20 W RMS

Accessories

- Included Accessories: Philips logo (x 1), Cleaning cloth (x 1), DVI-I Cable (1.8 m) (x 1), HDMI Cable (3 m) (x 1), IR sensor cable (1.8 m) (x 1), Power cable (x 3), RS232 Daisy chain cable (x 1), Touch Pen (x 2), USB A to B cable (3 m) (x 1), USB Cover (x 1), AAA batteries (x 1), Quick start guide (x 1), Remote control (x 1), RS232 cable (3 m) (x 1)

Multimedia Applications

- USB Playback Audio: AAC, M4A, MP3, WMA
- USB Playback Picture: BMP, JPEG, JPG, PNG
- USB Playback Video: ASF, AVI, DAT, FLV, MKV, MP4, MPEG, MPG, TS, VOB, WEBM, WMV

Miscellaneous

- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish
- Regulatory approvals: CE, RoHS, VCCI, CB, CU, EMF, EPA, ETL, FCC, Class A
- Warranty: 3 year warranty


Internal Player

- CPU: MTK5680
- Storage: 32 GB eMMC
- Wi-Fi: AP(WC0SR2511-88112BU), STA(WCT5GM2511MT7668AU)
- Micro SD Card: Support to 1TB
- RAM: DDR4 4 GB

Multi-touch Interactivity

- Touch points: 10 simultaneous touch points

Philips 65BDL6051C
Version: 4.1.1
Release Date: 2021-03-07

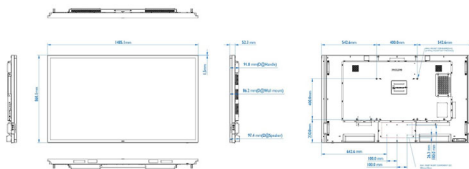

Issue date 2021-03-07

Version: 4.1.1

12 NC: 8670 001 70214
EAN: 87 12581 77086 0

© 2021 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com